


TL-55

Features

- 2 x 1000W Tungsten Halogen lamps
- 360° lamp rotation
- 4 Stage heavy duty telescopic mast to 5.5m
- Ultra compact (handles fold away)
- Utilise your own generator
- (Accepts any proprietary generator up to size 92.5 x 48 x 46.5cm)
- Flat packs for transport
- Optional long-run fuel tank
- Hand winch
- Telescopic stabilisers

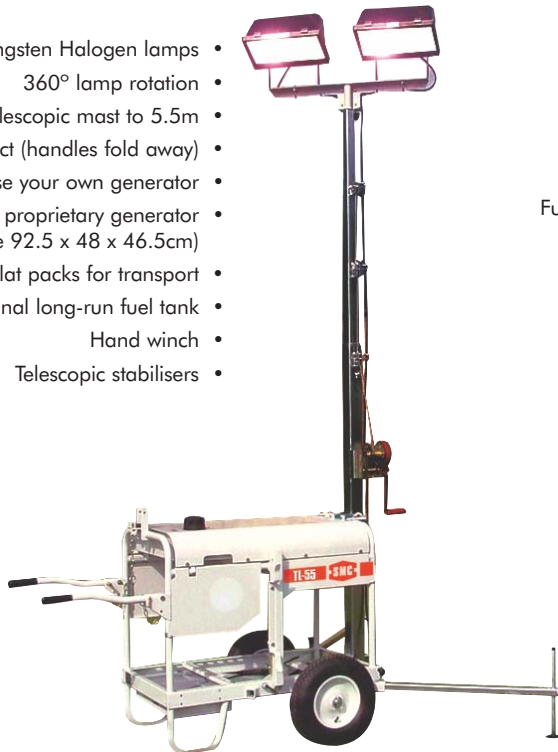

TL-35

Features

- 360° rotatable mast
- Electric winch as standard
- Automatic mast locking device – Simple, one-man operation
- *Optional PowerTilt lamp control
- Fully bundled unit – no oil/diesel spills
- Supersilent – 59dBA @ 7m
- 120 litre/80 hour run fuel tank
- Modern slimline light heads pivot in position for transit – Quick stow – fast tow



TL-55 TECHNICAL SPECIFICATION

Weight – (No Genpac)	82kg
Length – Stabilisers Deployed (Handles Down)	161cm
Width – Over Stabilisers (Deployed)	179.5cm
Generator Space LxWxH	92.5 x 48 x 46.5cm
Max Recommended Generator Weight	240kg
Running Voltage – TH Lamps	230V
Tyre/Wheel	4.00-8 6 Ply ST15 Fitted to 2.5 x 8 Wheel
Tyre Pressure	4.25 bar
Long-run Fuel Reservoir (option)	42 Litres
Mast (Telescopic)	4 Stage Zinc Plated
Mast Height	5.5m
Manual Winch – Rating (+ Brake)	350kg
Winch Rope Wire	Galvanised 3mm dia.
Minimum Wire Rope Breaking Load	590kg
Lamp Rotation	360°

TL-35 TECHNICAL SPECIFICATION

Weight: Std spec - fully fuelled (un-fuelled)	1087kg - (980kg)
Length – Road Unit	355cm
Width (Width – Stabilisers Deployed)	146cm - (263cm)
Height – Transport Mode	154cm
Lamp Specification	4 x 1000W 230V Metal Halide
Lumens	424,000
Engine – Kubota 1500rpm	D905-B, 3 cyl water cooled, 6.6kW (8.8bhp)
Alternator	Mecc Alte LT3 110 4 Pole 230V 50Hz
Power Outlet Sockets	2 x 16 Amp, 230V
Running Voltage – MH Lamps	130V
Road Unit	Single axle, fast tow, eye/ball type/ tow hitch, overrun & park brake
Fuel Reservoir (Steel)	120 Litres, Sight gauge
Maximum Run Time (4 Lamps Only)	80 Hours
Mast – Maximum Height	9.7m, 4 section galvanised
Sound Power Level	84 LWA
Noise Level @ 7 Metres	59 dBA (approx.)